




150、300-600 磅锻钢法兰止回阀

示例: H6CRFH

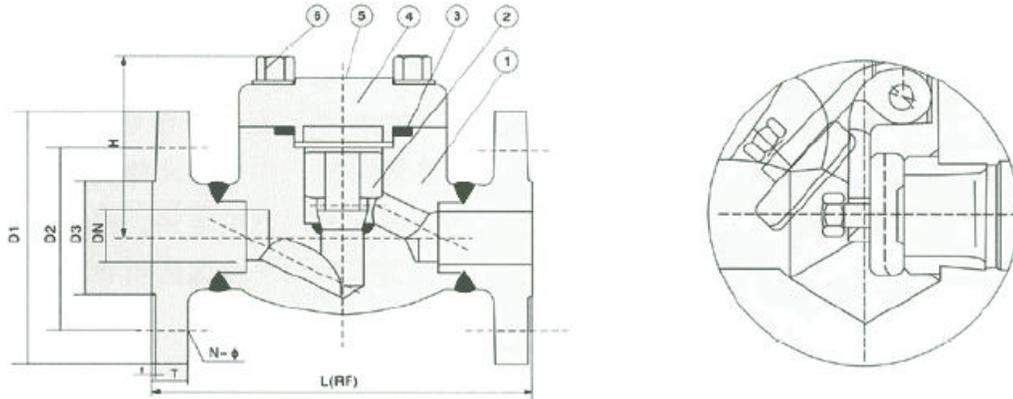

主要尺寸及重量

规格		压力磅级	L	H		D3	D2	D1	T	f	N-φ	重量(kg)	
英制	公制			缩径	全径							缩径	全径
1/2	15	150	108	61	61	35	60.5	89	11.5	1.6	4-16	2.56	3.37
		300	152				66.5	95	14.5	1.6	4-16	2.73	3.65
		600	165				66.5	95	14.5	6.4	4-16	3.00	4.00
3/4	20	150	117	61	78	43	70	98	13	1.6	4-16	3.37	4.37
		300	178				82.5	118	16	1.6	4-19	3.65	4.74
		600	190				82.5	118	16	6.4	4-19	4.00	5.83
1	25	150	127	78	84	51	79.5	108	14.5	1.6	4-16	4.37	8.17
		300	203				89	124	17.5	1.6	4-19	4.74	8.17
		600	216				89	124	17.5	6.4	4-19	5.83	9.47
1 1/4	32	150	140	84	103	63	89	118	16	1.6	4-16	8.17	8.94
		300	216				98.5	133	19.5	1.6	4-19	8.17	9.60
		600	229				98.5	133	21	6.4	4-19	9.47	10.10
1 1/2	40	150	165	103	118	73	98.5	127	17.5	1.6	4-16	8.94	12.04
		300	229				114.5	156	21	1.6	4-22.5	9.60	13.70
		600	241				114.5	156	22.5	6.4	4-22.5	10.10	15.61
2	50	150	203	118	132	92	120.5	152	19.5	1.6	4-19	12.64	14.3
		300	267				127	165	22.5	1.6	8-19	13.70	17.8
		600	292				127	165	25.5	6.4	8-19	15.61	24.6

标准材质明细表

序号	零件名称	CS to ASTM	AS to ASTM	SS to ASTM	
		Type A105N	Type F22	Type F304(L)	Type F316(L)
1	阀体	A105N	A182 F22	A182 F304(L)	A182 F316(L)
2	升降式 阀瓣	A276 420	A276 304	A276 304(L)	A276 316(L)
3	垫片	304英 柔性石墨		316英PTFE	
4	阀盖	A105N	A182 F22	A182 F304(L)	A182 F316(L)
5	铭牌	SS			
6	螺栓	A193 B7	A193 B16	A193 B8	A193 B8(M)
适用介质		水、蒸汽、油品等	水、蒸汽、油品等	硝酸、醋酸等	
适用温度		-29℃-425℃	-29℃-550℃	-29℃-200℃	

注意：客户需求的其他材质也可采用。密封圈材料配对由客户指定内件代号决定。CS = 碳钢; AS = 合金钢; SS = 不锈钢
 阀瓣可变换为节流型、针型、球型。