


RMTD341W 涡轮传动通风蝶阀

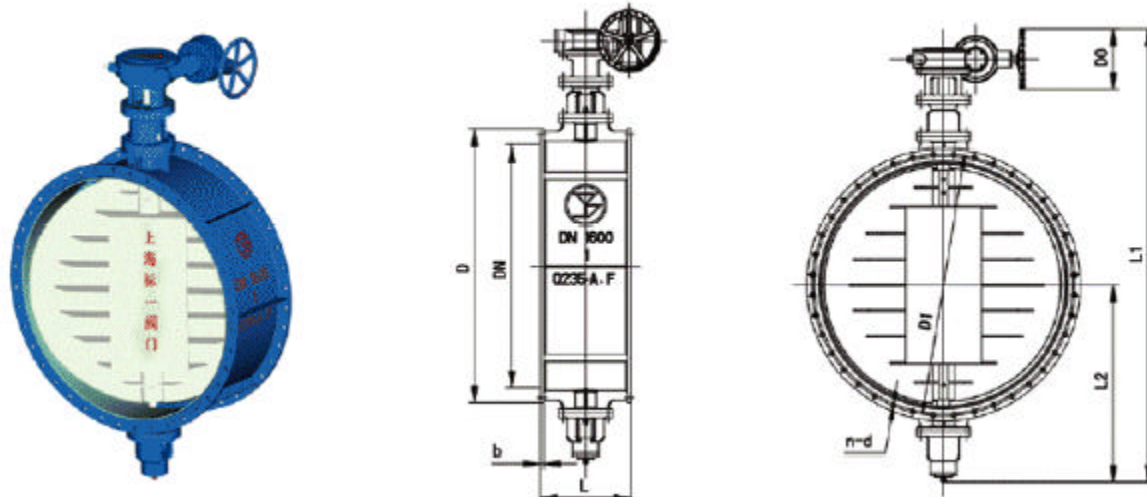

RMTD341W 涡轮传动通风蝶阀主要外形连接尺寸

单位: mm

DN	D	D1	L	L1	L2	n-φd	b
300	405	370	120	716	220	8-12	10
350	455	420	140	786	240	8-14	10
400	505	470	140	924	270	12-18	10
450	570	530	160	999	295	12-18	10
500	620	580	160	1079	325	12-18	10
600	720	680	180	1140	380	16-18	12
700	820	780	180	1240	430	16-18	12
800	920	880	200	1350	490	16-18	12
900	1040	990	200	1450	540	16-18	14
1000	1140	1090	220	1550	590	20-18	14
1100	1240	1190	220	1800	640	20-18	14
1200	1340	1290	240	1900	690	20-18	14
1300	1440	1390	240	2020	760	20-18	16
1400	1540	1490	260	2120	810	24-18	16
1500	1640	1590	260	2220	860	24-18	16
1600	1740	1690	280	2390	980	24-18	16
1700	1840	1790	280	2590	1030	28-22	16
1800	1940	1890	300	2709	1096	28-22	16
1900	2040	1990	300	2826	1146	32-22	16
2000	2150	2090	320	2926	1196	32-26	16
2200	2360	2300	340	3126	1296	36-26	18
2400	2560	2500	360	3326	1396	36-26	18
2600	2760	2700	380	3526	1496	40-26	18
2800	3960	2900	400	3726	1596	40-26	18
3000	3190	3110	400	4098	1698	44-30	20
3200	3390	3310	440	4338	1798	44-30	20
3400	3590	3510	440	4578	1898	48-30	20
3600	3790	3710	480	4780	1998	48-30	20
3800	4000	3910	480	5000	2098	52-30	22
4000	4210	4120	520	5200	2210	52-30	22