




H72H/Y/W _160/220/320 对夹立式止回阀

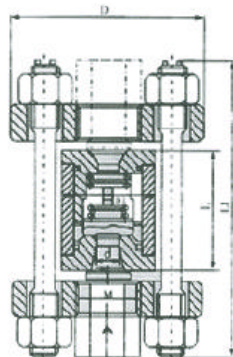

性能规范

型号	公称压力 (Mpa)	试验压力 (Mpa)		工作压力 (MPa)	工作温度 ()	工作介质
		强度	密封			
H72H-160	16	24	17.6	16	200	氨、氢、铜铵， 氨气、碱液
H72H-320	32	48	35.2	32	200	
H72W-220R	32	33	24.2	22	200	尿素、甲胺
H72W-320R	32	48	35.2	32	200	

主要零件材料

零件名称	阀座、阀瓣	阀盖	阀体	O形圈
H72Y-160 H72Y-320	铬钢	碳钢	铬钢	氟 26-41 橡胶
H72W-220R H72W-320R	铬镍钼不锈钢		-	

主要结构尺寸、连接尺寸和重量

型号	公称口径 DN(mm)	尺寸 (mm)						
		D	D1	d	Z-M	L	L1	重量(kg)
H72H/Y/W 160/220	10	95	42	10	M24×2	60	155	3.4
	15	95	42	12	M24×2	60	158	4.1
	25	105	50	15	M33×2	68	163	6.9
	32	115	62	25	M42×2	80	180	8.0
	40	165	88	32	M52×2	90	230	15
	50	165	88	39	M64×3	115	265	27
	65	200	116	53	M80×3	140	315	49
	80	225	138	60	M100×3	160	360	88
	100	260	160	76	M125×4	180	420	91
	125	300	195	90	M155×4	200	460	115
H72H/Y/W 220/320	10	95	42	10	M24×2	60	155	3.4
	15	105	50	12	M33×2	68	158	4.5
	25	115	62	23	M42×2	80	180	7.3
	32	135	70	29	M48×2	90	200	8.7
	40	165	88	34	M52×3	115	255	17
	50	200	116	53	M80×3	140	300	30
	65	225	138	60	M100×3	160	345	56
	80	260	160	68	M125×4	180	410	92
	100	300	195	85	M155×4	200	470	109
	125	330	212	120	M175×4	220	510	135
150	400	250	135	M215×6	240	570	160	