




H44Y、H44H、H44W 型 PN2.5 ~ 10MPa 旋启式止回阀

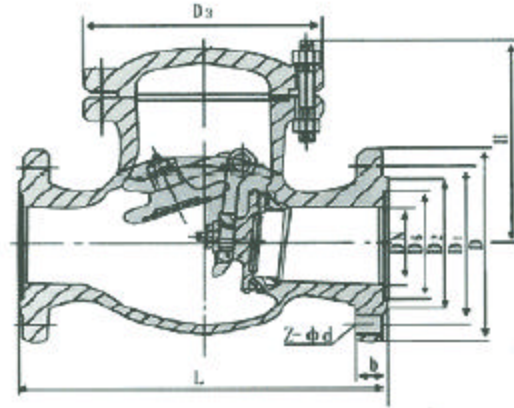

主要性能规范

型号	公称压力 PN/MPa	试验压力 P _s (MPa)		工作温度 ()	适用介质	工作温度 ()							
		壳体	密封			120	200	350	425	450	350		
						最高工作压力 P/MPa							
H44Y-4DI	4.0	6.0	4.0	550	水、蒸汽、油品	-	4.0	4.0	3.4	-	1.0		
H44M-40				450	二甲乙苯	-	-	-	-	1.8	-		
H44Y-40P				120		-	-	-	-	-	-		
H44W-40P				-20 ~ 150	苯菲尔溶液	3.7	-	-	-	-	-	-	
H44W-40R				-20 ~ 150	硝酸类	-	-	-	-	-	-	-	
H44Y-40P ₁				550	6.4	550	醋酸类	-	-	-	-	-	-
H44W-40P ₁							蒸气、空气、油品	-	4.0	-	-	-	2.2
H44Y-64P ₁	-	4.0	-				-	-	2.2				
H44Y-64I	5.1	9.6	6.4	550	水、蒸气、油品	-	6.4	-	-	-	3.6		
					-	-	5.3	4.6	-	1.6			

主要零件材料

零件名称	阀体、阀盖、 摇杆	阀瓣	销轴	螺栓	螺母	垫片
H44Y-4DI H44Y-64I	铬钼铸钢	铬钼钛铸钢	铬不锈钢	铬钼钒钢	铬钼钢	不锈钢带与石 棉板
H44M-40	碳素铸钢	优质碳钢				
H44Y-40P H44W-40P	铬镍钛铸钢		铬镍钢		不锈钢	聚四氟乙烯
H44W-40R	铬镍钛铸钢		-			聚四氟乙烯
H44Y-40P ₁ H44W-40P ₁ H44Y-64P ₁	铬镍钛耐热钢		-			



主要尺寸及重量

H44Y-40I、H44M-40、H44Y-40P、H44Y-40P1、H44W-40P1、H44W40P、H44W-40R

公称通径 DN/mm	尺寸 /mm									重量 /kg
	L	D	D ₁	D ₂	D ₅	b	Z-φd	D ₃	H	
50	230	160	125	100	88	20	4-φ18	185	172	20
65	290	180	145	120	110	22	8-φ18	210	182	30
80	310	195	160	135	121	22	8-φ18	210	192	35
100	350	230	190	160	150	24	8-φ23	260	217	50
125	400	270	220	198	176	28	8-φ25	295	250	75
150	480	300	250	218	204	30	8-φ25	330	270	105
200	550	375	320	282	260	38	12-φ30	390	320	160
250	650	445	385	345	313	42	12-φ34	445	356	240
350	850	570	510	465	422	52	16-φ34	615	518	352

H44Y-64I、H44Y-64P、

公称通径 DN/mm	尺寸 /mm									重量 /kg
	L	D	D ₁	D ₂	D ₅	b	Z-φd	D ₃	H	
50	300	175	135	105	88	28	4-φ23	200	177	27
65	340	200	160	130	110	28	8-φ23	225	197	37
80	380	210	170	140	121	30	8-φ23	250	212	53
100	430	250	200	168	150	32	8-φ25	315	248	90
125	500	295	240	202	176	36	8-φ30	365	298	135
150	550	340	280	240	204	38	8-φ34	410	330	187
200	650	405	345	300	260	44	12-φ34	480	385	212
250	775	470	400	352	313	48	12-φ41	565	445	403