





闸阀、截止阀



重型闸阀Z41W

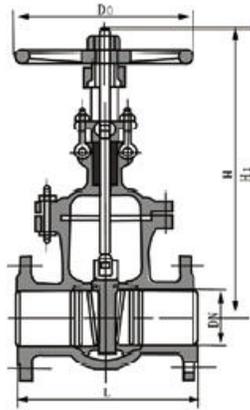

J41W-16^P R

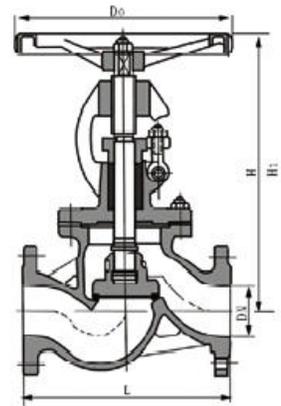

一、主要技术参数

公称压力 PN (MPa)	试验压力 (MPa)			适用介质	适用温度
	壳体	密封 (液体)	低压密封 (气)		
1.6	2.4	1.76	0.6	水、蒸汽、油等	125
2.5	3.75	2.75			

二、主要零件材料

阀体、阀盖	阀杆、阀瓣、阀座密封面	阀杆螺母	填料
不锈钢	不锈钢	铝青铜	柔性石墨
蝶阀			

三、主要外形尺寸 (法兰尺寸按 JB/T79-94 标准)

型 号	公称压力 PN (MPa)	公称通径 DN (mm)	尺 寸 (mm)			
			L	H	H1	D0
Z41H-16C Z41H-16P Z41H-16R	1.6	15	130	175	195	200
		20	150	180	205	200
		25	160	210	240	220
		32	180	210	240	220
		40	240	350	425	240
		50	250	358	430	240
		65	265	373	452	240
		80	280	435	530	280
		100	300	500	620	320
		125	325	614	756	360
		150	350	674	845	360
		200	400	818	1041	400
		250	450	969	1244	450
		300	500	1145	1474	560
350	550	1280	1663	640		
400	600	1450	1886	720		
500	700	1676	2181	720		



Z41H-25 Z41H-25P Z41H-25R	2.5	15	130	175	195	200
		20	150	180	205	200
		25	160	210	240	220
		32	180	210	240	220
		40	240	350	425	240
		50	250	358	430	240
		65	265	373	452	240
		80	280	435	530	280
		100	300	501	620	320
		125	325	614	756	360
		150	350	674	845	360
		200	400	818	1041	400
		250	450	969	1244	450
		300	500	1145	1474	560
350	550	1280	1663	640		
400	600	1450	1886	720		
型 号	公称压力 PN (MPa)	公称通径 DN (mm)	尺 寸 (mm)			
			L	H	H1	D0
J41H-16C J41H-16P J41H-16R	1.6	10	130	198	207	120
		15	130	218	228	120
		20	150	258	272	140
		25	160	275	292	160
		32	180	280	308	160
		40	200	330	354	200
		50	230	350	380	240
		65	290	400	428	240
		80	310	355	390	280
		100	350	415	460	280
		125	400	460	520	320
		150	480	510	580	360
		200	600	710	806	400
		250	650	950	880	720
300	750	1120	995	800		
J41H-25 J41H-25P J41H-25R	2.5	10	130	198	207	120
		15	130	233	241	120
		20	150	275	285	140
		25	160	285	300	160
		32	180	302	327	180
		40	200	355	385	200
		50	230	362	397	240
		65	290	325	345	280
		80	310	369	420	280
		100	350	370	425	320
		125	400	558	608	400
		150	480	611	692	400
		200	600	720	806	400
		250	650	950	880	720
300	750	1120	995	800		