




Z73X-6/10/16 手动浆液阀

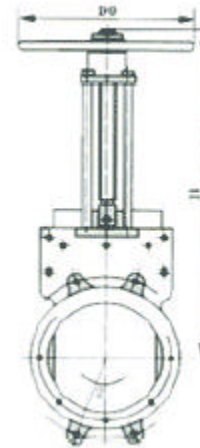

主要性能规范 Chief Property And Specification

公称压力 (MPa) Nominal Pressure	壳体 (MPa) Shell	密封 (MPa) Seel	工作温度 Working Temperature	适用介质 Suitable
0.6	0.9	0.66	80	纸浆、煤浆、灰、灰渣 Admixtute Of Duffand Water、 Water
1.0	1.5	1.8	80	

主要外型及连接尺寸 Main External And Connecting Dimensions(mm)

公称通径DN Nominal Diameter	L		D	D ₁	D ₀	H	n-M
	PN6	PN10					
50	48	48	125	100	180	295	4-M16
65	48	48	145	120	180	305	4-M16
80	50	50	160	135	220	330	8-M16
100	50	50	180	155	220	380	8-M16
125	50	50	210	185	240	415	8-M16
150	60	60	240	210	280	490	8-M20
200	60	60	295	265	280	550	8-M20
250	70	70	350	320	360	693	12-M20
300	80	80	400	368	400	796	12-M20
350	80	90	460	428	400	895	16-M20
400	90	120	515	482	500	1004	16-M22
450	90	120	565	532	500	1110	20-M22
500	90	130	620	585	600	1210	20-M22
600	140	140	725	685	700	1460	20-M27
700	140	140	840	800	800	1680	24-M27
800	190	190	950	905	800	1910	24-M30
900	203	203	1050	1005	800	2130	28-M30
1000	216	216	1160	1115	800	2350	28-M30
1200	254	254	1380	1325	800	2650	32-M30