



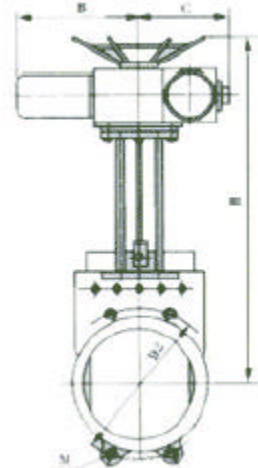

Z973X-6/10/16 电动浆液阀

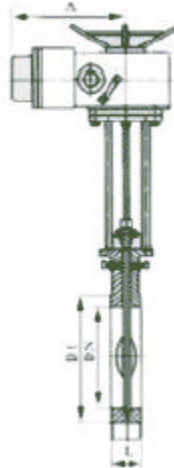

主要性能规范 Chief Property And Specification

| 公称压力 (MPa) Nominal Pressure | 密封试验 Seel Test | 壳体试验 Shell Test | 工作温度 Working Temperature | 适用介质 Suitable |
|--------------------------------|-------------------|--------------------|-----------------------------|--|
| 0.6 MPa | 0.66 MPa | 0.9 MPa | -10 -120 | 泥浆、煤浆、纸浆、粮浆、粒状物等介质 Admixtute Of Duffand Water、Pulp、Studge、Dross |
| 1.0 MPa | 1.1 MPa | 1.5 MPa | | |

主要外型及连接尺寸 Main External And Connecting Dimensions(mm)

| DN | L | | D2 | D1 | H | L0 | L1 | L2 |
|------|-----|-----|------|------|------|----|----|----|
| | 0.6 | 1.0 | | | | | | |
| 50 | 48 | 48 | 125 | 100 | 600 | | | |
| 65 | 48 | 48 | 145 | 120 | 670 | | | |
| 80 | 50 | 50 | 160 | 135 | 680 | | | |
| 100 | 50 | 50 | 180 | 155 | 700 | | | |
| 125 | 50 | 50 | 210 | 185 | 720 | | | |
| 150 | 60 | 60 | 240 | 210 | 790 | | | |
| 200 | 60 | 60 | 295 | 265 | 850 | | | |
| 250 | 70 | 70 | 350 | 320 | 1100 | | | |
| 300 | 70 | 80 | 400 | 368 | 1180 | | | |
| 350 | 80 | 90 | 460 | 428 | 1280 | | | |
| 400 | 80 | 120 | 515 | 482 | 1460 | | | |
| 450 | 90 | 120 | 565 | 532 | 1600 | | | |
| 500 | 90 | 130 | 620 | 585 | 1800 | | | |
| 600 | 140 | 140 | 725 | 685 | 2100 | | | |
| 700 | 140 | 140 | 840 | 800 | 2300 | | | |
| 800 | 190 | 190 | 950 | 905 | 2500 | | | |
| 900 | 203 | 203 | 1050 | 1005 | 2700 | | | |
| 1000 | 216 | 216 | 1160 | 1115 | 2900 | | | |
| 1200 | 254 | 254 | 1380 | 1325 | 3400 | | | |