



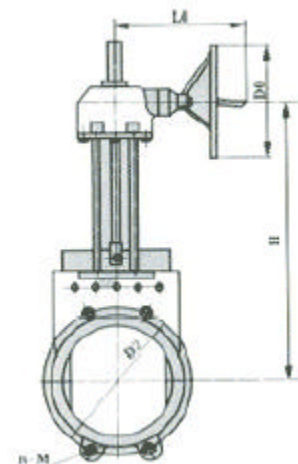

Z573X-6/10/16 伞链轮浆液阀

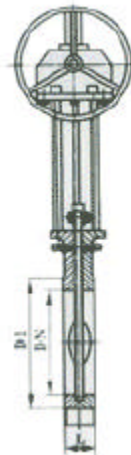

主要性能规范 Chief Property And Specification

公称压力 (MPa) Nominal Pressure	密封试验 (MPa) Shell Test	壳体试验 (MPa) Seel Test	工作温度 Working Temperature	适用介质 Suitable
0.6 MPa	0.66 MPa	0.9 MPa	-100 -120	泥浆、煤浆、纸浆、粮浆、粒状物等介质 Admixtute Of Duffand Water、Pulp、Studge、Dross
1.0 MPa	1.1 MPa	1.5 MPa		

主要外型及连接尺寸 Main External And Connecting Dimensions(mm)

公称通径DN Nominal Diameter	结构长度L		D1	D2	H	L0	D0	n-M
	0.6	1.0						
50	48	48	100	125	300	400	250	4-M16
65	48	48	120	145	310	400	250	4-M16
80	50	50	135	160	330	400	250	4-M16
100	50	50	155	180	380	400	250	8-M16
125	50	50	185	210	440	400	250	8-M16
150	60	60	210	240	500	400	250	8-M20
200	60	60	265	295	580	400	250	8-M20
250	70	70	320	350	670	420	300	12-M20
300	70	80	368	400	820	420	300	12-M20
350	80	90	428	460	900	420	300	16-M20
400	90	120	482	515	1020	420	300	16-M22
450	90	120	532	565	1150	420	300	20-M22
500	90	130	585	620	1250	420	300	20-M22
600	140	140	685	725	1500	420	300	20-M27
700	140	140	800	840	1750	420	300	24-M27
800	190	190	905	950	2000	420	300	24-M30
900	203	203	1005	1050	2300	420	300	28-M30
1000	216	216	1115	1160	2500	420	300	28-M30
1200	254	254	1325	1380	2800	420	300	32-M36