




X43W-1.0T  
三通全铜旋塞阀  
主要性能规范



X43T-1.0  
二通铜芯旋塞阀



X43W-1.0  
二通铸铁旋塞阀

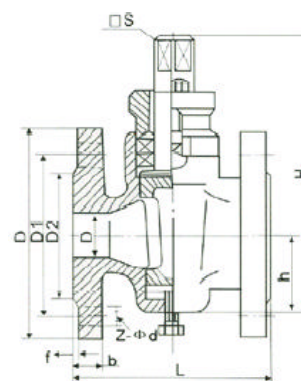

型号	公称压力 PN (MPa)	试验压力 PS(MPa)		适用介质	工作温度 ( )
		壳体	密封		
X43W-1.0T	1.0	1.5	1.1	水、蒸汽、油品	100
X43T-1.0	1.0	1.5	1.1	水、蒸汽、油品	100
X43W-1.0	1.0	1.5	1.1	煤气、油品	100

## 主要零件材料

零件名称	阀体	塞子	填料压盖	填料
X43W-1.0T	铸铜	铸铁	铸铁	油浸石棉盘根 柔性石墨
X43T-1.0	铸铁	铸铜	铸铁	
X43W-1.0	铸铁	铸铁	铸铁	

## 主要尺寸

型号	公称口径 DN(mm)	尺寸 (mm)									
		L	D	D1	D2	f	b	z-φd	□s	h	H
X43W-1.0T X43T-1.0 X43W-1.0	15	80	95	65	45	2	14	4-φ14	14	26	99
	20	90	105	75	55	2	16	4-φ14	14	34	124
	25	110	115	85	65	2	16	4-φ14	17	38	133
	32	115	135	100	78	2	18	4-φ18	18	45	152
	40	150	145	110	85	3	18	4-φ18	26	55	212
	50	170	160	125	100	3	20	4-φ18	28	74	260
	65	220	180	145	120	3	20	4-φ18	32	82	295
	80	250	195	160	135	3	22	4-φ18	40	95	327
	100	300	215	180	155	3	26	8-φ18	45	135	425
	125	350	245	210	185	3	24	8-φ18	54	154	482
	150	400	280	240	210	3	24	8-φ23	62	172	512
	200	450	335	295	265	3	24	8-φ23	75	195	605
250	530	390	350	320	3	28	12-φ23	85	230	660	
300	580	440	400	368	4	30	12-φ23	100	263	760	