






手动调节阀、自锁手动调节阀

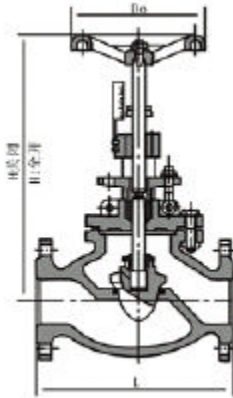

法兰连接手动调节阀
(TJ40H 型)

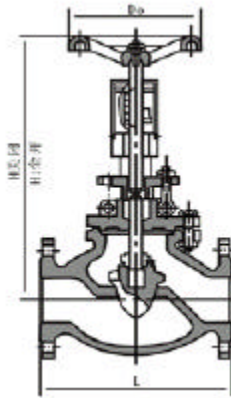

法兰连接自锁手动调节阀
(TS40H 型)

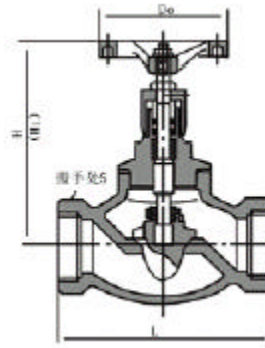

内螺纹连接自锁手动调节阀
(TJ10H 型)



一、概述

本厂生产的手动调节阀及自锁手动调节阀主要用于城市集中供热，循环水工程热电厂管网和制冷空调等工程中，具有截止、节流和调节流量的作用可取代节流孔板，是一种可变化孔径的节流装置，介质温度：425。

二、主要零件材料

零件材料	阀体、阀盖、填料压盖	阀杆、阀瓣、密封圈	指示盘、阀杆螺母、螺帽套
材料	灰铸铁、铸钢、不锈钢	不锈钢	黄铜

三、主要外形尺寸 (法兰连接按尺寸：PN10 按 GB-4216 标准，PN16、PN25 按 JB/T97-94 标准)

型 号	尺 寸 (mm)																			
	DN	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
TJ40H-10 TJ40H-10	L													622	698	787	914	978	978	1295
	H													914	914	968	968	1100	1440	1790
	H ₁													1074	1074	1168	1168	1350	1440	1790
	D ₀																			
TJ40H-16 TJ40H-16C TS40H-16 TS40H-16C TJ40H-25 TS40H-25	L	130	150	160	180	200	230	290	310	350	400	480	495							
	H	160	160	182	192	250	264	380	413	466	540	623	687							
	H ₁	172	172	195	210	273	290	426	468	530	613	698	777							
	D ₀	65	65	80	80	120	120	200	200	240	260	360	400							
TJ10H-10 TJ10H-16C TJ10H-25	L	90	100	120	140	170	200													
	H	150	160	182	192	250	264													
	H ₁	160	170	197	207	270	284													
	D ₀	80	80	80	90	100	120													