


弹簧全启式封闭式高压安全阀

用途 Applications

该阀适用于存在变动背压和有毒易燃的容器设备或管路系统。作为安全保护装置。WA42Y-C 型适用于工作温度 300 的空气、石油气、无腐蚀性的气体等，WA42Y-P 型适用于工作温度 200 的硝酸等介质。

The valve is to be used as safely device in containers or pipeline systems with changeable backpressure and poisonous or flammable medium.WA42Y-C is to be used in air,petroleum gas or other non-corrosive gas with operation temperature no higher than 300 .while WA42Y-P is applicable for nitric acid with operation temperature no higher than 200 .

公称通径 Nominal diameter DN(mm)	尺寸 Dimensions (mm)			
	d ₀	L	L ₁	DN'
25	15	110	95	32
32	20	115	100	40
40	25	120	110	50
50	32	135	120	65
80	50	170	135	100
100	65	195	175	125
150	100	255	230	200
200	125	300	260	250

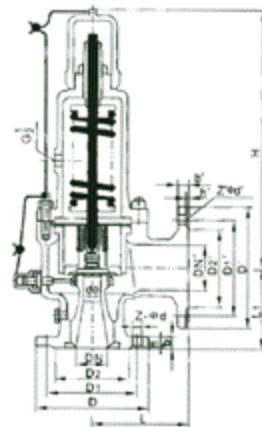

WA42Y- 16 C
25 P
40 R