



A40Y-16C/25/40 ,A40Y-16/25/40 带散热器弹簧全启式安全阀


用途 Applications

A40Y-16C 型适用于工作温度 420 ，A40Y-16I 型适用于工作温度 450 的空气、石油气等介质的设备和管路上，作为超压保护装置。当设备和管路内压力超过允许值时，阀门自动开启，继而全量排放；当压力降低至规定值时，阀门自动关闭，保护设备安全运行。

A40Y-16C is applicable in operation temperature no higher than 420 .while A40Y-16I is to be used as over-pressure protection device in equipments and pipelines of air or petroleum gas with operation temperature no higher than 450 .When the pressure in equipment or pipeline exceeds allowed value.the valve will open automatically and fully discharge,then close again when the pressure towered to the regulated value so as to ensure the safe operation of the equipment or pipeline.

主要零部件材料 Materials for main part

公称通径 Nominal diameter DN(mm)	尺寸 Dimensions(mm)				
	D0	L	L1	DN'	H
40	25	120	110	50	380
50	32	135	120	65	430
80	50	170	150	100	580

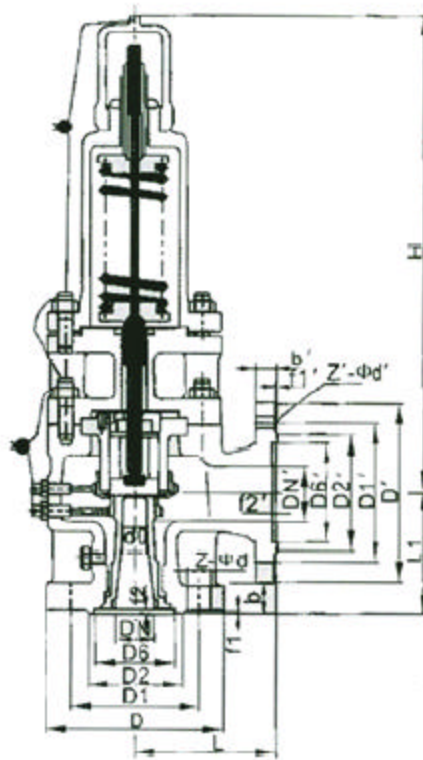

A40Y-16C/25/40/64/100 C
P
R