

空压机安全阀


用途 Applications

本阀门适用于工作温度 200 的空气、系空压机专用安全阀，当设备内压力超允许值时，阀门自动开启，继而全量排放，当压力降低到规定值时，阀门自动关闭，保证设备安全运行。

The valve of the air what the working temperature are less than 200 ,is air compressor specificity safely valve.When the pressure of equipment exceeding the allowed value,the valve will turn on automatically and discharge the pressure entirely,when the pressure decrease to the stated value,the valve will quickly turn off automatically,in order to make the equipment run effectively.

主要零部件材料 Materials for main parts

NO.	零件名称 Name of part	AQ-20 材料 Materials
1	阀体 Body	2Cr13
2	阀座 Nozzle	2Cr13
3	阀瓣 Disc	2Cr13
4	阀杆 Stem	2Cr13
5	阀盖 Bonnet	ZG230-450
6	阀帽 Cap	ZG230-450

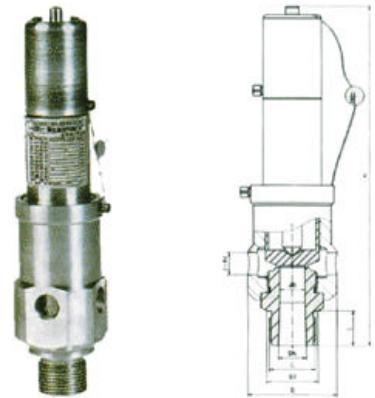

AQ-20

外形尺寸和连接尺寸 Dimensions(mm)

公称通径DN(mm) Nominal diameter	尺寸 Dimension (mm)						
	d _o	G	D	D ₁	Z-φd	L	H
20	17	G1"	62	44	4-17	25	220
25	20	M36×2	70	50	4-20	28	226