


双联弹簧式安全阀

用途 Applications


该阀门适用于工作温度-40 ~ +80 液化石油气泵出口的液相回流管道上,用于超压介质的安全回流,当泵前压力超过规定值时,阀门自动开启,并起安全回流入罐,能保证设备和管路的安全运行。



立式液相安全回流阀
AH42F-16C
25
40

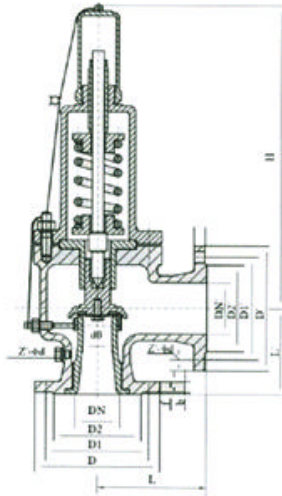

水平式液相安全回流阀
AH42F-P18

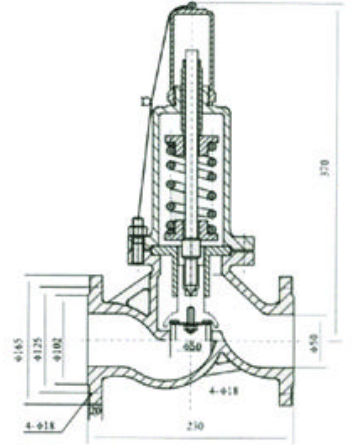

主要零部件材料 Materials for main parts

公称通径DN(mm) Nominal diameter	AH42F-P18型尺寸 Dimension (mm)						
	D	D ₁	D ₂	b	Z-φd	L	H
40	150	110	85	16	4-18	200	236
50	165	125	100	16	4-18	230	266
65	185	145	120	20	4-18	290	430
80	200	160	135	20	8-18	310	490
100	215	180	155	22	8-18	350	548
150	280	240	210	24	8-23	480	706

公称通径 Nominal diameter DN(mm)	AH42F-16 ^C 型主要连接尺寸和外形尺寸 Dimensions (mm)																重量 Weight (kg)	
	L	L ₁	D	D ₁	D ₂	b	f	Z-φd	DN'	D'	D ₁ '	D ₂ '	b'	f'	Z'-φd'	H		d ₀
25	100	95	115	85	65	14	2	4-φ14	32	140	100	78	16	3	4-φ18	250	15	12
32	115	100	140	100	78	16	2	4-φ18	40	150	110	85	16	3	4-φ18	280	20	14
40	120	110	150	110	85	16	3	4-φ18	50	165	125	100	16	3	4-φ18	290	25	16
50	135	120	165	125	100	16	3	4-φ18	65	185	145	120	18	3	4-φ18	341	32	21
80	170	135	200	160	135	18	3	8-φ18	100	220	180	155	20	3	8-φ18	470	50	43
100	205	160	220	180	155	20	3	8-φ18	125	250	210	185	22	3	8-φ18	580	65	65
150	250	210	285	240	210	24	3	8-φ22	175	315	270	240	26	3	8-φ23	670	100	110