

弹簧微启式安全阀


用途 Applications

A41H 型适用于工作温度 300 的空气、石油、水等介质的设备和管路上。
 A41Y16/25/40P 型适于工作温度 200 有腐蚀性介质的设备和管路上。A47H 型适用于温度 350 的蒸汽、空气、水等介质的设备和管路上。当设备和管路内压力超过允许值时，阀门自动开启，继而全量排放；当压力降低到规定值时，阀门自动关闭，保证设备和管路的安全运行。


公称通径DN(mm) Nominal diameter	尺寸 Dimensions (mm)			
	d ₀	L	L ₁	DN'
25	20	100	85	25
32	25	115	100	32
40	32	120	110	40
50	40	135	120	50
65	50	140	130	65
80	65	160	135	80
100	80	170	160	100
125	100	190	190	125
150	125	205	195	150
200	150	240	245	200



A41H-16C/25/40

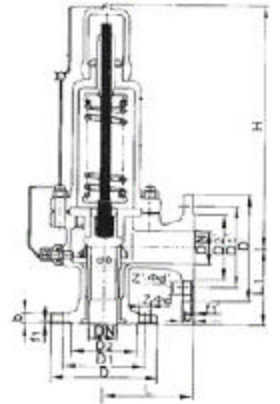

A41H-16C/25/40

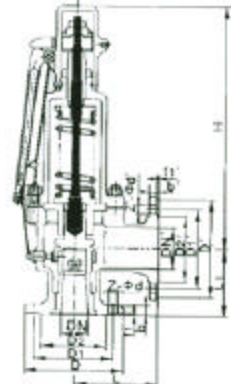

主要零部件材料 Materials for main parts

NO.	零件名称 Name of part	A41H-C/KA41Y-C 材料 Materials	A41Y-P/KA41Y-P 材料 Materials	A41Y-R/KA41Y-C 材料 Materials
1	阀体 Body	WCB	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
2	阀座 Nozzle	ZG2Cr13/1Cr18Ni9Ti	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
3	调节圈 Adjusting ring	ZG2Cr13/1Cr18Ni9Ti	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
4	阀瓣 Disc	2Cr13/1Cr18Ni9Ti	1Cr18Ni9Ti	1Cr18Ni12Mo2Ti
5	导向套 Guide sleeve	ZG2Cr12/1Cr18Ni9Ti	ZG1Cr18Ni9Ti	ZG1Cr18Ni12Mo2Ti
6	阀盖 Bonnet	ZG230-450	ZG230-450	ZG230-450
7	弹簧 Spring	50CrVA	50CrVA 包覆氟塑料 Coated Teflon	50CrVA 包覆氟塑料 Coated Teflon
8	阀杆 Stem	2Cr13	2Cr13	1Cr18Ni12Mo2Ti
9	调整螺杆 Adjusting bolt	45	2Cr13	2Cr13
10	保护罩 Cap	G200-400	ZG200-400	G200-400
	密封面材料 Sealing surface of material	堆焊 D507	堆焊 Co 基硬质合金 Depositing stellite	

注：K...表示抗硫安全阀。Note:K....sulfur resistant safety valve.