


弹簧微启封闭式高压安全阀


用途 Applications

A41Y-160、320 适用于工作温度 300 的空气、氨氢混合气、水等介质的设备和管路上。A41Y-160P/320P、A41Y-160R、320R 型适于工作温度 200 有腐蚀性气体或液体介质的设备和管路上，作为超压保护装置。

连接法兰按 JB/T2769-92 的标准。

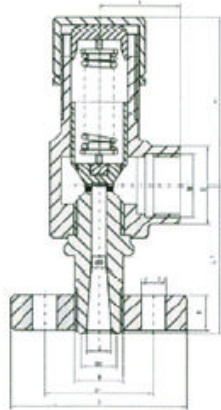

A41Y-160_R^C (单法兰)

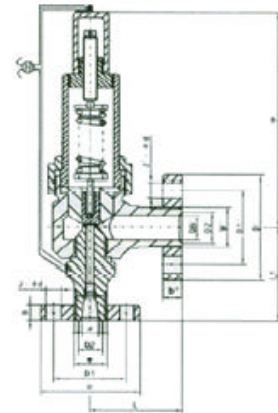

A41Y-160/320_R^C (双法兰)

外形尺寸和连接尺寸 Dimensions(mm)

型号 Type	公称 通径 (DN)	do	d	M	D	K	Z-φd	b	d ₁	M ₁	D ₁	K ₁	Z ₁ -φd ₁	b ₁	L	L ₁	≈H
A41Y-160 (单法兰)	15	8	20	M24×2	95	60	3-18	20	/	M33×2	36	/	/	/	50	80	85
	20	10	25	M27×2	95	60	3-18	20	/	M33×2	48	/	/	/	50	80	85
	25	12	28	M33×2	105	68	3-18	20	/	M33×2	48	/	/	/	50	80	85
A41Y-160	10	8	18	M24×2	95	60	3-18	20	29	M42×2	115	80	4-18	22	95	100	261
	15	8	20	M24×2	95	60	3-18	20	29	M42×2	115	80	4-18	22	95	100	261
	20	10	27	M33×2	105	68	3-18	20	29	M42×2	115	80	4-18	22	95	100	261
	25	12	28	M33×2	105	68	3-18	20	50	M64×3	165	115	6-26	32	130	135	285
	32	12.14.16	37	M42×2	115	80	4-18	22	50	M64×3	165	115	6-26	32	130	135	285
	40	20	47	M52×2	165	115	6-26	28	65	M80×3	200	145	6-29	40	165	165	350
A41Y-320	50	25	58	M64×3	165	115	6-26	32	80	M100×3	225	170	6-33	80	165	165	380
	10	8	18	M24×2	95	60	3-18	20	29	M42×2	115	80	4-18	22	95	100	261
	15	8	27	M33×2	105	68	3-18	20	29	M42×2	115	80	4-18	22	95	100	261
	20	10	30	M36×2	110	75	3-18	20	29	M42×2	115	80	4-18	22	95	100	261
	25	12	35	M42×2	115	80	4-18	22	50	M64×3	165	115	6-26	32	130	135	285
	32	12.14.16	41	M48×2	135	95	4-22	25	50	M64×3	165	115	6-26	32	130	135	285
	40	20	58	M64×3	165	115	6-26	32	65	M80×3	200	145	6-29	40	165	115	350
50	25	70	M80×3	200	145	6-29	40	80	M100×3	225	170	6-33	50	165	165	380	