




J13W-1.6/32P 型针型阀

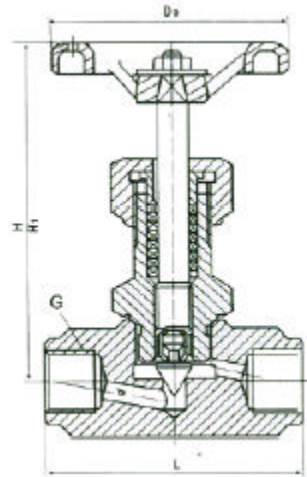

主要零件材料 Materials for main parts

零件名称 Part name	阀杆、阀盖 Stem, Bonnet	阀杆、阀瓣 Stem, Disc	填料 Packing
J13W-16P	铬镍不锈钢 Cr, Ni Stainless steel	铬镍不锈钢 Cr, Ni Stainless steel	聚四氟乙稀、柔性石墨 PTFE, Soft graphite
J13W-160、J13W-40	优质碳钢 High grade carbon steel	优质碳钢 High grade carbon steel	

主要性能规范 Chief Property and specification

型号 Type	公称压力 (MPa) Nominal Pressure	试验压力 PS (MPa) Test pressure			工作压力 (MPa) Working Pressure	工作温度 () Working Temperature	适用介质 Suitable
		壳体 (MPa) Shell	密封 (液) Seel	密封 (气) Seel			
J13W-16	1.6	2.4	1.76	0.6	1.6	P 540	液化石油气水、酸、蒸汽、油品等 Petroleum gas Water, Acid, Steam, Oil etc.
J13W40P	4.0	6.0	4.4	0.6	4.0		
J13W-160	16.0	24.0	17.6	0.6	16.0		
J13W-320P	32.0	48.0	35.2	0.6	32.0	C 425	

主要外型及连接尺寸 Main External And Connecting Dimensions(mm)

公称直径DN(mm) Nominal diameter	管螺纹G Source joint	尺寸 Dimensions					重量(kg) Weight
		D0	L	H	H1	d	
6	1/4	60	55	90	100	4	0.63
10	3/8	60	60	92	102	5	0.65
15	1/2	65	65	97	107	6	0.8
20	3/4	80	80	109	121	8	1.07
25	1	100	90	122	132	10	1.8
32	1 1/4	140	128	180	191	15	5.0
40	1 1/2	160	148	200	215	18	7.2